


Model Info | Load Charts

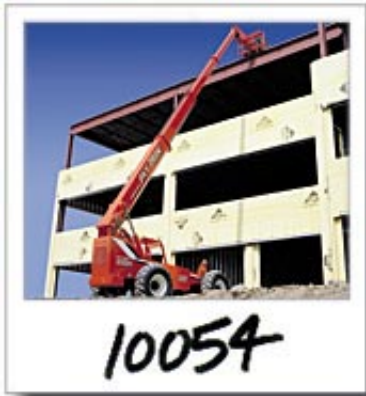

- 10,000 lb. (4540 kg) max. lift capacity and 53'2" (16,2 m) max. lift height
- Sealed bearings extend service intervals, lower maintenance costs
- Exclusive interlock system keeps outriggers set for full boom extension
- Full time 4-wheel drive and 4-wheel steer
- Re-designed cab for improved operator comfort and safety
- 4-speed modulated transmission combined with high performance axles for increased production and maneuverability
- Patented Stabil-SKY TRAK load placement system increases operator confidence
- Machine design eliminates the need for liquid filled tires